




ООО «Полимер Экспорт»

ПРОМЫШЛЕННЫЕ ЛАКОКРАСОЧНЫЕ ПОКРЫТИЯ

8 (4932)773-503

raum-profile.ru  
inmarketing@gk-rp.ru

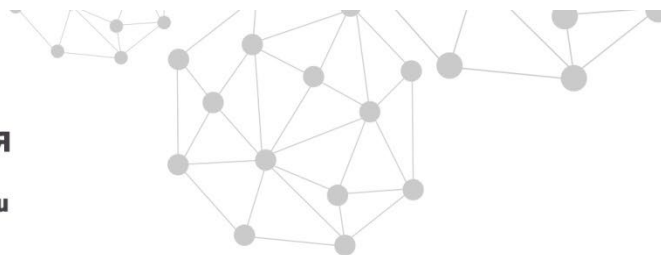

Release date: 01.10.2024  
Manufacturer: Russian Federation  
ТУ 20.30.11-019-69372620-2023

## THERMO INSULATING PAINT «ANTIKONDENSAT»

### CERTIFICATE

State Registration Certificate № RU 08.08.09.008.E.002204.09.23 от 20.09.2023 г.  
Expert Report № 1851 от 06.09.2023 г.

### DESCRIPTION

Water-based thermal protective coating filled with hollow micro spheres.

### FIELDS OF APPLICATION

«Antikondensat» thermo insulating paint is intended for insulation of cooling and air conditioning systems, in water pipelines and in systems with refrigerant.  
Due to its unique properties, the paint prevents condensation formation on cold water pipelines, thereby preventing mold, mildew and rust formation on the surface. The paint is almost odourless, easy and evenly applied on the surface. Thermo-insulating paint "Antikondensat" is non-toxic and healthy - friendly. It does not contain organic solvents. Tinting is possible.

### TECHNICAL DATA

Surface	White homogeneous suspension, after drying forms a solid elastic coating without foreign inclusions.
Gloss	Matt
Density in liquid, no more	0,57±0,05 g/cm <sup>3</sup>
Open time to grade 3 at t = (20±2) °C, no more	120 min
Readiness for operations	7 days
Conductance at 20°C, no more	0,022 W/m°C
Tensile strength, no less	0,3 MPA
Breaking extension, No more	12%
Impact strength, no less	1 MPa
Surface temperature	From +7°C to +50°C
Effective use range	From -60°C to +150°C
Theoretical coverage per 1 m <sup>2</sup> at DFT 1000 mc	1140 g

### INSTRUCTION FOR USE

All surfaces must be clean and free from old paint, dust, dirt, oil and grease.

#### Metal structures preparation:

Metal structures must be dry and clean (free of dust, dirt, grease, oil and rust) and must be primed with anticorrosive primers (depending on the type of metal structures and their operating conditions): the anticorrosive layer thickness must be at least 50 microns. The type and conditions of paint application and varnish material used as a primer layer must be agreed with "RAUM-PROFIE" company technical service.  
After priming the metal structure is maintained for at least 24 hours depending on the exterior temperature and



Собственное  
современное  
производство



Система  
Менеджмента  
Качества  
(ISO 9001)



Аттестованная  
лаборатория



На рынке  
с 2002 года




ООО «Полимер Экспорт»

ПРОМЫШЛЕННЫЕ ЛАКОКРАСОЧНЫЕ ПОКРЫТИЯ

8 (4932)773-503

raum-profile.ru  
inmarketing@gk-rp.ru

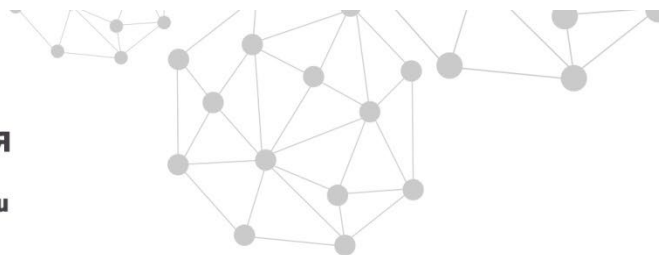

humidity.

**Attention!** Under-dried primer layer as well as contaminants presence on the metal structures surface can cause thermal insulation coating cracking and partial detachment.

**For more detailed information, see the manual instructions.\***

#### CONDITIONS

It should be used in a dry room or in an open area with low humidity and without weather elements, at temperature of +10°C to + 25°C.

#### APPLICATION

##### Preparing

Ready to use. Before applying, make sure the package is tight, check the release date of the batch and the expiration date. After opening, the container contents should be mixed mechanically (drill or mixer with an appropriate attachment) for 5-7 minutes at a speed of 200 Rev/min. Manual stirring at least 10 minutes. Can be thinned with water before application if needed. The amount of water depends on the base temperature and subsequent operation, but not more than 5% by volume.

##### Air-free spray

Nozzle diameter: 0,025"-0,030"  
Initial pressure: 180-200 atm

##### Brush

Use for small areas only

##### Thinner

Water

##### Cleaner

Water

##### Cleaning

Clean the equipment after use according to the manual.

The composition is applied in layers with intermediate drying between coats at least 24 hours at temperature +20°C and relative humidity not more than 80% with **wet layer thickness 0.3-0.4 mm**. At a temperature below +20°C and air humidity more than 80% the composition drying time may increase. Do not apply in the presence of moisture (water, dew, ice, frost) on the surface to be painted.

**Attention!** Wet or exceeding recommended thickness of applied thermal insulation coating layer **can cause subsequent cracking and peeling coating**. At a temperature below recommended application process film coating does not occur.

#### PACKAGE SIZE

Plastic bucket 20 l: 10 kg.

#### STORAGE

Keep the containers tightly closed in a dry room at a temperature from +5 °C to +40 °C away from sources of heat and ignition. While keeping and delivering 3 tires stacking of containers with gaskets in between is allowed. **DO NOT FREEZE!**

#### GUARANTED STORAGE LIFE

Expire date is 6 months in case if delivery and storing rules are followed. After expire date shouldn't be used without tests.

#### HEALTH AND SAFETY

Observe precautionary measures. Use means of individual protection (respirators, gloves, glasses, etc.). Use under well ventilated conditions. Use in places without sources of open fire and ignition only. Avoid skin or eyes contact. Spillage on the skin should immediately be removed with suitable cleanser, soap and water, don't use solvents. If eyes contact, rinse with clean water for at least 10 minutes, consult a doctor. In case of ingestion consult a doctor.

#### RECYCLING

Packing materials are recycled as consumer waste.

Further Information.

The recommendations above are based on our own research and our best knowledge but don't fully guarantee any particular case as it depends on the quality, friability and porosity of the base. The local working conditions and methods may vary and are beyond our control. Therefore we cannot be held responsible for the actual work on the site. The information is currently updating.

